

**ALUMINIJ PRAVOKOTNE CEVI – IZTISNJENE, T66**

Dimenzija, dovoljena odstopanja, prerez in masa – po EN 755-7

Material po

EN 573-3, 755-2

Dolžina cevi: 6 m

Certifikat: EN 10204/3.1

**ALUMINIUM RECTANGULAR TUBES – EXTRUDED, T66**

Dimensions, tolerances, cross section and mass – according to EN 755-7

Material according to EN 573-3, 755-2

Tube length: 6 m

Certificate: EN 10204/3.1


**ALUMINIUM-RECHTECKROHR – GEPRESST, T66**

Maße, Grenzabmasse und Formtoleranzen, Querschnitt und Masse – gemäß EN 755-7

Material gemäß EN 573-3, 755-2

Rohrlänge: 6 m

WAZ: EN 10204/3.1

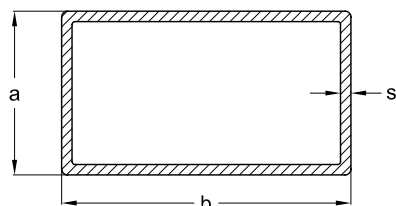

Dimenzija / mm Dimension / mm Abmessung / mm	Teža / kg/m Weight / kg/m Gewicht / kg/m
a x b x s	
20 x 10 x 1,5	0,22
20 x 10 x 2,0	0,29
20 x 15 x 2,0	0,36
25 x 15 x 1,5	0,31
25 x 15 x 2,0	0,40
25 x 20 x 2,0	0,45
30 x 15 x 1,5	0,35
30 x 15 x 2,0	0,46
30 x 20 x 2,0	0,52
30 x 25 x 2,0	0,56
35 x 20 x 2,0	0,56
35 x 25 x 2,0	0,62
40 x 15 x 2,0	0,57
40 x 20 x 1,5	0,47
40 x 20 x 2,0	0,63
40 x 20 x 2,5	0,76
40 x 20 x 3,0	0,92
40 x 25 x 2,0	0,68
40 x 30 x 2,0	0,71
40 x 30 x 2,5	1,09
40 x 30 x 3,0	1,06
45 x 25 x 2,0	0,73
50 x 15 x 2,0	0,67
50 x 20 x 2,0	0,73
50 x 20 x 3,0	1,09
50 x 25 x 2,0	0,79

Dimenzija / mm Dimension / mm Abmessung / mm	Teža / kg/m Weight / kg/m Gewicht / kg/m
a x b x s	
50 x 25 x 3,0	1,14
50 x 30 x 2,0	0,84
50 x 30 x 2,5	1,05
50 x 30 x 3,0	1,25
50 x 40 x 2,0	0,95
50 x 40 x 2,5	1,17
50 x 40 x 4,0	1,80
60 x 20 x 2,0	0,84
60 x 25 x 2,0	0,89
60 x 25 x 3,0	1,30
60 x 30 x 2,0	0,95
60 x 30 x 3,0	1,41
60 x 40 x 2,0	1,01
60 x 40 x 2,5	1,31
60 x 40 x 3,0	1,57
60 x 40 x 4,0	2,07
60 x 45 x 3,0	1,65
60 x 50 x 3,0	1,72
80 x 20 x 2,0	1,06
80 x 30 x 2,0	1,17
80 x 40 x 2,0	1,27
80 x 40 x 2,5	1,58
80 x 40 x 3,0	1,90
80 x 40 x 4,0	2,51
80 x 50 x 3,0	2,05
80 x 50 x 4,0	2,68

Dimenzija / mm Dimension / mm Abmessung / mm	Teža / kg/m Weight / kg/m Gewicht / kg/m
a x b x s	
80 x 60 x 4,0	2,90
100 x 18 x 2,0	1,25
100 x 20 x 2,0	1,28
100 x 30 x 2,0	1,39
100 x 40 x 3,0	2,21
100 x 40 x 4,0	2,94
100 x 44 x 2,0	1,53
100 x 50 x 2,0	1,60
100 x 50 x 3,0	2,38
100 x 50 x 4,0	3,15
100 x 50 x 5,0	3,85
100 x 60 x 3,0	2,54
100 x 60 x 4,0	3,37
120 x 20 x 2,0	1,50
120 x 30 x 3,0	2,38
120 x 40 x 2,5	2,13
120 x 40 x 4,0	3,37
120 x 50 x 4,0	3,56
120 x 60 x 4,0	3,80
130 x 50 x 4,0	3,80
150 x 40 x 4,0	4,02
150 x 50 x 3,0	3,19
150 x 50 x 4,0	4,23
150 x 80 x 4,0	4,88
200 x 50 x 4,0	5,30
200 x 65 x 3,0	4,24

EN AW 6060 (AlMgSi0,50)

Legenda: / Legend: / Legende:

Na zalogi  
In stock  
Auf Lager

Dobavljivo glede na povpraševanje  
Deliverable on demand  
Auf Anfrage lieferbar

**ALUMINIJ KVADRATNE CEVI –  
IZTISNJENE, T66**

Dimenzije, dovoljena odstopanja,  
prez in masa – po EN 755–7

Material po  
EN 573–3, 755–2

Dolžina cevi: 6 m

Certifikat: EN 10204/3.1

**ALUMINIUM SQUARE TUBING –  
EXTRUDED, T66**

Dimensions, tolerances, cross section  
and mass – according to EN 755–7

Material according to EN 573–3,  
755–2

Tube length: 6 m

Certificate: EN 10204/3.1


**ALUMINIUM-QUADRATROHR –  
GEPRESST, T66**

Maße, Grenzabmasse und  
Formtoleranzen, Querschnitt und  
Masse – gemäß EN 755–7

Material gemäß EN 573–3, 755–2

Rohrlänge: 6 m

WAZ: EN 10204/3.1



Dimenzija / mm Dimension / mm Abmessung / mm	Teža / kg/m Weight / kg/m Gewicht / kg/m
<b>a x a x s</b>	
15 x 15 x 1,5	0,23
15 x 15 x 2,0	0,30
20 x 20 x 1,0	0,21
20 x 20 x 1,2	0,26
20 x 20 x 1,5	0,32
20 x 20 x 2,0	0,41
20 x 20 x 3,0	0,58
25 x 25 x 1,5	0,39
25 x 25 x 2,0	0,52
25 x 25 x 2,5	0,63
25 x 25 x 3,0	0,73
30 x 30 x 1,5	0,48
30 x 30 x 2,0	0,63
30 x 30 x 2,5	0,77
30 x 30 x 3,0	0,90
35 x 35 x 1,5	0,56

Dimenzija / mm Dimension / mm Abmessung / mm	Teža / kg/m Weight / kg/m Gewicht / kg/m
<b>a x a x s</b>	
35 x 35 x 2,0	0,73
35 x 35 x 2,5	0,90
35 x 35 x 3,0	1,06
40 x 40 x 2,0	0,84
40 x 40 x 2,5	1,03
40 x 40 x 3,0	1,22
40 x 40 x 4,0	1,56
45 x 45 x 2,0	0,95
50 x 50 x 2,0	1,06
50 x 50 x 2,5	1,31
50 x 50 x 3,0	1,55
50 x 50 x 4,0	1,99
50 x 50 x 5,0	2,48
60 x 60 x 2,0	1,27
60 x 60 x 2,5	1,58

Dimenzija / mm Dimension / mm Abmessung / mm	Teža / kg/m Weight / kg/m Gewicht / kg/m
<b>a x a x s</b>	
60 x 60 x 3,0	1,87
60 x 60 x 4,0	2,42
65 x 65 x 2,5	1,71
70 x 70 x 2,0	1,49
70 x 70 x 4,0	2,85
80 x 80 x 2,0	1,71
80 x 80 x 3,0	2,52
80 x 80 x 4,0	3,28
80 x 80 x 5,0	3,98
90 x 90 x 4,0	3,78
100 x 100 x 2,0	2,14
100 x 100 x 3,0	3,17
100 x 100 x 4,0	4,15
100 x 100 x 5,0	5,10
120 x 120 x 5,0	6,10

EN AW 6060 (AlMgSi0,50)

Legenda: / Legend: / Legende:

Na zalogi  
In stock  
Auf Lager

Dobavljivo glede na povpraševanje  
Deliverable on demand  
Auf Anfrage lieferbar

**ALUMINIJ OKROGLE CEVI –  
IZTISNJENE, T66**

Premer, dovoljena odstopanja, prerez  
in masa – po EN 755–7

Material po  
EN 573–3, 755–2

Dolžina cevi: 6 m

Certifikat: EN 10204/3.1

**ALUMINIUM ROUND TUBES –  
EXTRUDED, T66**

Diameter, tolerances, cross section  
and mass – according to EN 755–7

Material according to EN 573–3,  
755–2

Tube length: 6 m

Certificate: EN 10204/3.1


**ALUMINIUM-RUNDROHR –  
GEPRESST, T66**

Durchmesser, Grenzabmasse und  
Formtoleranzen, Querschnitt und  
Masse – gemäß EN 755–7

Material gemäß EN 573–3, 755–2

Rohrlänge: 6 m

WAZ: EN 10204/3.1



Dimenzija / mm Dimension / mm Abmessung / mm	Teža / kg/m Weight / kg/m Gewicht / kg/m
<b>d x s</b>	
6 x 1,0	0,04
8 x 1,0	0,06
10 x 1,0	0,08
12 x 1,0	0,09
12 x 1,5	0,13
12 x 2,0	0,17
13 x 1,0	0,10
13 x 1,5	0,15
14 x 1,0	0,11
14 x 1,5	0,16
14 x 2,0	0,20
15 x 1,5	0,18
15 x 2,0	0,23
16 x 1,0	0,13
16 x 1,5	0,19
16 x 2,0	0,24
16 x 3,0	0,33
18 x 1,5	0,21
19 x 1,5	0,22
20 x 1,5	0,24
20 x 2,0	0,31
20 x 5,0	0,70
22 x 1,5	0,27
22 x 2,0	0,35
25 x 1,5	0,30
25 x 2,0	0,39
25 x 2,5	0,49
25 x 3,0	0,56
25 x 5,0	0,85
28 x 1,5	0,34
28 x 2,0	0,45

Dimenzija / mm Dimension / mm Abmessung / mm	Teža / kg/m Weight / kg/m Gewicht / kg/m
<b>d x s</b>	
28 x 3,0	0,64
30 x 1,5	0,37
30 x 2,0	0,48
30 x 2,5	0,59
30 x 3,0	0,69
30 x 5,0	1,06
32 x 1,5	0,40
32 x 2,0	0,51
35 x 1,5	0,43
35 x 2,0	0,56
35 x 2,5	0,70
35 x 3,0	0,81
35 x 5,0	1,27
35 x 6,0	1,48
36 x 1,5	0,44
36 x 8,0	1,90
37 x 2,5	0,73
38 x 3,0	0,89
38 x 4,0	1,15
40 x 1,5	0,50
40 x 2,0	0,64
40 x 2,5	0,81
40 x 3,0	0,94
40 x 5,0	1,48
42 x 2,0	0,69
42 x 3,0	1,99
42 x 4,0	1,29
44 x 1,5	0,54
45 x 1,5	0,55
45 x 2,0	0,74
45 x 2,5	0,92

Dimenzija / mm Dimension / mm Abmessung / mm	Teža / kg/m Weight / kg/m Gewicht / kg/m
<b>d x s</b>	
45 x 3,0	1,07
45 x 5,0	1,70
48 x 1,5	0,59
48 x 3,0	1,14
48 x 4,0	1,49
50 x 1,5	0,63
50 x 2,0	0,81
50 x 2,5	1,03
50 x 3,0	1,20
50 x 5,0	1,91
50 x 10,0	3,45
50 x 15,0	4,65
52 x 1,5	0,64
55 x 2,5	1,13
57 x 2,0	0,93
57 x 5,0	2,20
60 x 1,5	0,74
60 x 2,0	0,98
60 x 2,5	1,24
60 x 3,0	1,45
60 x 3,5	1,68
60 x 5,0	2,33
60 x 6,0	2,75
60 x 10,0	4,32
62 x 2,0	1,02
63 x 3,0	1,53
70 x 2,0	1,17
70 x 3,0	1,70
70 x 5,0	2,76
70 x 8,0	4,21
70 x 10,0	5,09

Dimenzija / mm Dimension / mm Abmessung / mm	Teža / kg/m Weight / kg/m Gewicht / kg/m
d x s	
70 x 15,0	7,30
70 x 20,0	8,90
75 x 2,0	1,24
76 x 3,0	1,86
80 x 2,0	1,32
80 x 2,5	1,67
80 x 3,0	1,96
80 x 4,0	2,58
80 x 5,0	3,18
80 x 10,0	6,05
80 x 20,0	10,60
80 x 25,0	12,20
84 x 2,0	1,39
85 x 2,5	1,75
89 x 3,0	2,19
90 x 2,0	1,52
90 x 3,0	2,25
90 x 5,0	3,67

Dimenzija / mm Dimension / mm Abmessung / mm	Teža / kg/m Weight / kg/m Gewicht / kg/m
d x s	
90 x 20,0	12,40
100 x 2,0	1,66
100 x 3,0	2,47
100 x 4,0	3,59
100 x 5,0	4,03
100 x 10,0	7,77
100 x 15,0	11,30
100 x 20,0	14,20
100 x 30,0	18,60
108 x 3,0	2,67
110 x 5,0	4,53
112 x 2,5	2,32
120 x 3,0	3,03
120 x 4,0	4,01
120 x 5,0	4,87
120 x 10,0	9,50
120 x 20,0	17,70
125 x 4,0	4,10

Dimenzija / mm Dimension / mm Abmessung / mm	Teža / kg/m Weight / kg/m Gewicht / kg/m
d x s	
125 x 12,5	11,90
130 x 5,0	5,40
133 x 4,0	4,37
135 x 5,0	5,50
140 x 4,0	4,61
140 x 5,0	5,83
140 x 20,0	21,30
150 x 5,0	6,10
150 x 10,0	11,90
150 x 15,0	17,90
160 x 5,0	6,69
160 x 20,0	24,80
165 x 5,0	6,80
180 x 20,0	28,30
200 x 5,0	8,30
200 x 20,0	31,90
220 x 5,0	9,10
250 x 20,0	40,70

EN AW 6060 (AlMgSi0,50)

Legenda: / Legend: / Legende:

Na zalogi  
In stock  
Auf Lager

Dobavljivo glede na povpraševanje  
Deliverable on demand  
Auf Anfrage lieferbar

Primerjalna tabela materialov / Comparative table of materials / Vergleichstabelle der Materialien

DIN (1712, 1725)	Stanje Temper Zustand	EN	Stanje Temper Zustand
Al, 99.5	F7	AW-1050A	F
E.Al	F7	AW-1350A	F
Al, Mg, Si0.5	F13, F17, F18, F22	AW-6060	T4, T5, T6, T64, T66
Al, Mg, Si0.5	F25	AW-6063	T4, T5, T6, T64, T66
Al, Mg, Si0.7	F26, F27	AW-6005A	T4, T6
Al, Mg, Si1	F21, F28, F31	AW-6082	T4, T6